
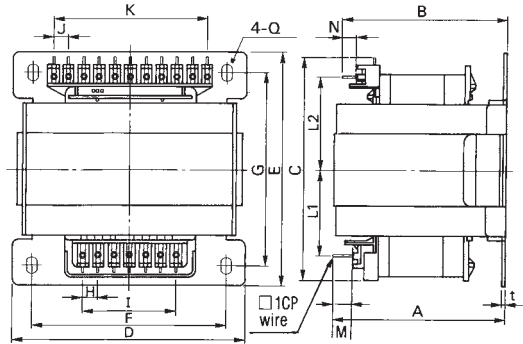


電源トランス
Power Transformers

PEHM SERIES

UL B種対応可能
Compatible with UL B type



カタログ品番 Catalog No.	標準出力 Standard Output VA	MAX A	MAX B	MAX C	±1 D	±1 E	±1 F	±1 G	P.Pin間隔		S.Pin間隔		±1 L1	±1 L2	±1 M	±1 N	±0.3 Q	t	ピン数 1次-2次 Qty of pin PRI-SEC	参考質量 Weight approx. (kg)
									±0.5 H	±1 I	±0.5 J	±1 K								
PEHM66-60	75	66	67	99	90	92	70	80	7.5	45	6	54	39.0	42.0	10	10	4.5x6.5	1.2	7-10	1.6
PEHM76-50	105	75	76	103	88	77	72	78	7.5	45	7.5	67.5	36.5	40.5	15	8.0	4.5x6.5	1.6	7-10	2.1
PEHM76-55	115	75	76	108	88	82	72	78	7.5	45	7.5	67.5	39.0	43.0	15	8.0	4.5x6.5	1.6	7-10	2.4
PEHM76-60	125	75	76	113	88	87	72	78	7.5	45	7.5	67.5	41.5	45.5	15	8.0	4.5x6.5	1.6	7-10	2.8
PEHM76-65	135	75	76	118	88	92	72	78	7.5	45	7.5	67.5	44.0	48.0	15	8.0	4.5x6.5	1.6	7-10	3.1
PEHM85-50-1	152	83	83	105	110.5	85	100	70	7.5	45	7.5	82.5	37.5	38.5	10	10	4.5x6.5	1.6	7-12	2.8
PEHM85-50-2	152	83	83	105	86	92	72	78	7.5	45	7.5	67.5	37.5	41.5	10	10	4.5x8.0	1.6	7-10	2.8
PEHM85-55-2	167	83	83	110	86	92	72	78	7.5	45	7.5	67.5	40.0	44.0	10	10	4.5x8.0	1.6	7-10	3.0
PEHM85-60-1	182	83	83	115	110.5	95	100	80	7.5	45	7.5	82.5	42.5	43.5	10	10	4.5x6.5	1.6	7-12	3.2
PEHM85-60-2	182	83	83	115	86	92	72	78	7.5	45	7.5	67.5	42.5	46.5	10	10	4.5x8.0	1.6	7-10	3.2
PEHM85-65-1	197	83	83	120	110.5	100	100	85	7.5	45	7.5	82.5	45.0	46.0	10	10	4.5x6.5	1.6	7-12	3.5
PEHM85-65-2	197	83	83	120	86	92	72	78	7.5	45	7.5	67.5	45.0	49.0	10	10	4.5x6.5	1.6	7-10	3.5
PEHM85-70	212	88	88	125	110.5	100	100	85	7.5	45	7.5	82.5	45.0	46.0	10	10	4.5x6.5	1.6	7-12	3.8
PEHM96-55-1	213	91	91	110	114	105	100	85	7.5	45	7.5	75	37.5	40.5	8.0	8.0	5.5x10	1.6	7-11	3.8
PEHM96-55-2	213	91	91	110	100	99	84	83	7.5	45	7.5	67.5	37.5	45	8.0	8.0	4.5x8.0	1.6	7-10	3.8
PEHM96-60-1	233	91	91	114	114	110	100	85	7.5	45	7.5	75	40	43	8.0	8.0	5.5x10	1.6	7-11	4.1
PEHM96-60-2	233	91	91	114	100	99	84	83	7.5	45	7.5	67.5	40	47.5	8.0	8.0	4.5x8.0	1.6	7-10	4.1
PEHM96-65-1	252	91	91	119	114	115	100	95	7.5	45	7.5	75	42.5	45.5	8.0	8.0	5.5x10	1.6	7-11	4.4
PEHM96-65-2	252	91	91	119	100	99	84	83	7.5	45	7.5	67.5	42.5	50	8.0	8.0	4.5x8.0	1.6	7-10	4.4
PEHM96-70	262	91	91	125	100	115	100	95	7.5	45	7.5	75	42.5	45.5	8.0	8.0	4.5x8.0	1.6	7-11	4.7
PEHM96-80-2	282	91	91	134	100	115	84	95	7.5	45	7.5	67.5	50	57.5	8.0	8.0	4.5x6.5	1.6	7-10	5.4
PEHM105-65	300	94	94	129	120	113	92	82	7.5	45	7.5	82.5	44.5	52.5	8.0	8.0	4.5x8.0	1.6	7-11	4.7
PEHM105-75	361	94	94	134	120	123	92	92	7.5	45	7.5	82.5	49.5	57.5	8.0	8.0	4.5x8.0	1.6	7-12	5.8
PEHM114-65-1	380	105	104	130	120	126	100	100	10	60	7.5	82.5			8.8	9.0	4.5x8.0	1.6	7-12	6
PEHM114-65-2	380	105	104	146	120	126	100	100	10	60	7.5	82.5			8.8	9.0	4.5x8.0	1.6	7-24	6
PEHM114-75-1	440	105	104	140	120	126	100	100	10	60	7.5	82.5			8.8	9.0	4.5x8.0	1.6	7-12	6.8
PEHM114-75-2	440	105	104	156	120	126	100	100	10	60	7.5	82.5			8.8	9.0	4.5x8.0	1.6	7-24	6.8
PEHM114-85-1	500	105	104	150	120	126	100	100	10	60	7.5	82.5			8.8	9.0	4.5x8.0	1.6	7-12	7.6
PEHM114-85-2	500	105	104	166	120	126	100	100	10	60	7.5	82.5			8.8	9.0	4.5x8.0	1.6	7-24	7.6
PEHM114-100-1	590	105	104	165	120	146	100	125	10	60	7.5	82.5			8.8	9.0	4.5x8.0	1.6	7-12	8.8
PEHM114-100-2	590	105	104	181	120	146	100	125	10	60	7.5	82.5			8.8	9.0	4.5x8.0	1.6	7-24	8.8
PEHM114-110-1	650	105	104	175	120	146	100	125	10	60	7.5	82.5			8.8	9.0	4.5x8.0	1.6	7-12	9.6
PEHM114-110-2	650	105	104	191	120	146	100	125	10	60	7.5	82.5			8.8	9.0	4.5x8.0	1.6	7-24	9.6