
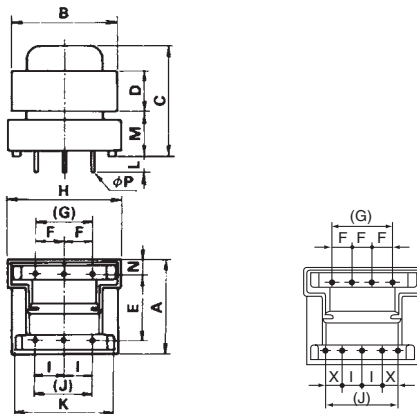


電源トランス  
Power Transformers

PEPF SERIES



カタログ品番 Catalog No	標準出力 Standard Output VA	+1 -0.5 A	+1 -0.5 B	±1 C	+1 -0.5 D	±0.7 E	1次側 Pri.			2次側 Sec.			±1 L	±1 M	±1 N	P	ピン本数 Qty of pin		参考質量 Weight approx. (kg)
							±0.5 F	(G)	MAX H	±0.5 I	(J)	MAX K					1次側 Pri.	2次側 Sec.	
PEPF35-20	3.5	30	35.5	41.5	20.5	27.5	7.5	22.5	36	7.5	15	25.5	4	13.5	2.5	1	4	3	0.17
PEPF41-14	3.5	33.5	41.5	37	14.5	22.5	7.5	22.5	41	<sup>5</sup> / <sub>7.5</sub>	25	41	4	11.5	5.5	1	4	5	0.15
PEPF41-16	4.5	33.5	41.5	39	16.5	22.5	7.5	22.5	41	<sup>5</sup> / <sub>7.5</sub>	25	41	4	11.5	5.5	1	4	5	0.20
PEPF41-21	6	33.5	41.5	45	21.5	22.5	7.5	22.5	34	<sup>5</sup> / <sub>7.5</sub>	25	41	4	12.5	5.5	1	4	5	0.24
PEPF41-23	6.5	33.5	41.5	46.5	23.5	22.5	7.5	22.5	34	<sup>5</sup> / <sub>7.5</sub>	25	39	4	11.5	5	1	4	5	0.27
PEPF48-13	4.5	40.5	48.5	29.5	13.5	27.5	7.5	30	49	7.5	30	42	4	10	3	1.2	5	5	0.18
PEPF48-15	7.5	40.5	48.5	35	15	29	7.5	30	42.5	7.5	30	41	4	10	4.5	1.0	5	5	0.25
PEPF48-18	8	40.5	48.5	44	18.5	27.5	7.5	30	46	7.5	30	43	5	15.5	4	1.2	5	5	0.30
PEPF48-23	10.5	40.5	48.5	48.5	23.5	27.5	7.5	30	38	<sup>5</sup> / <sub>7.5</sub>	40	46	4.5	15	4	1.2	5	7	0.36
PEPF48-28	14.5	40.5	48.5	54	28.5	27.5	7.5	30	46	7.5	30	43	5	15.5	4	1.2	5	5	0.46
PEPF66-10	6	55.5	66.5	30	10.5	35	7.5	30	55	7.5	30	51	4	12	4.5	1.2	5	5	0.34

\* PEPF48-13、66-10 につきましては基盤差込用穴がありますので、別途問合せ願います。  
\*As PEPF48-13、66-10 have board plug-in holes, Please inquire us.